

# Dahua Access Control Temperature Monitoring

Face recognition/Temperature Monitoring/Integration



Temperature measuring  
distance: 0.3m-0.7m



Temperature accuracy:  
 $\pm 0.5^{\circ}\text{C}$





Temperature  
abnormal alarm




Large face capacity

## Key Features

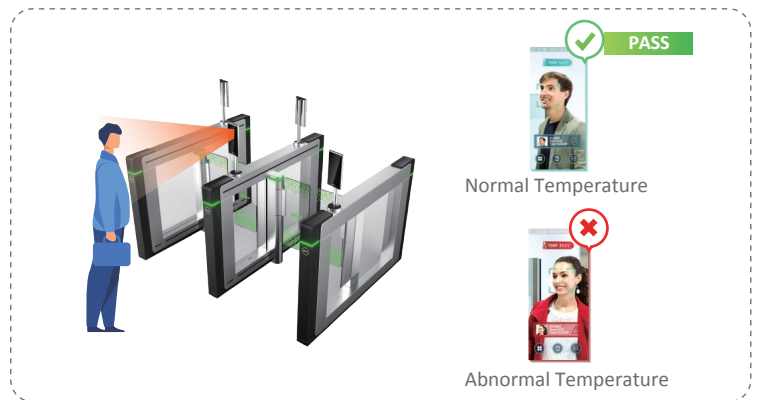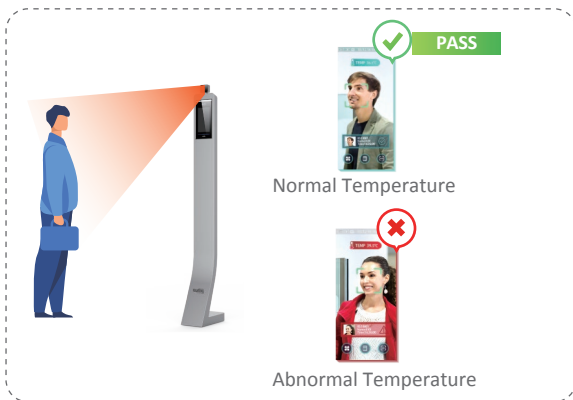

- Body temperature monitoring to be integrated with face recognition, no human guard required.
- Non-contact access to reduce cross-infection.
- Storage of face and temperature information, easy to back-tracking.
- Fast access to prevent congestion.

## Application Scenario



## Products



DHI-ASI7213X-T/  
DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring distance: 0.3m ~ 0.7m
- Sound prompt: Temperature abnormal alarm



DHI-ASI7223X-A-T/  
DHI-ASGB8xxX/DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring distance: 0.3m ~ 0.7m
- Sound prompt: Temperature abnormal alarm



DHI-ASI7213X-T/  
DHI-ASF172X-T/DSS-Express

- Temperature accuracy:  $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring distance: 0.3m~0.7m
- Sound prompt: Temperature abnormal alarm

\* Design and specifications are subject to change without notice.

Ver.1, Apr. 2020

## DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053  
Tel: +86-571-87688883 Fax: +86-571-87688815  
Email: overseas@dahuatech.com  
www.dahuasecurity.com

